



CANNOT BE SOLD IN THE EU

Construction

Pump casing with suction and delivery connections with the same diameter and on the same axis (in-line).

Materials:

Pump casing	Cast iron
Impeller	Stainless steel
Shaft	Stainless steel

Applications

For clean liquids, without abrasives, which are non-aggressive for the pump materials (contents of solids up to 0.2%).

For heating, conditioning, cooling and circulation plants.

For civil and industrial applications.

When low noise operation is required.

Operating conditions

Liquid temperature from -10 °C to +120 °C (in short-time duty up to + 140 °C).

Ambient temperature up to 40 °C.

Maximum glycol quantity: 50% (Mixture with more than 20% glycol content require rechecking of the pumping data).

Maximum permissible working pressure 6/10 bar.

TYPE	Minimum suction pressure: bar		
	Temperature		
	50 °C	80 °C	110 °C
NC 40	0,05	0,8	1,4
NC 50	0,3	1	1,6
NC 65	0,3	1	1,6
NC 80	0,3	1	1,6

Motor

2-4-pole induction motor, 50 Hz.
Three adjustable speeds.


NC: three-phase 230V or 400 V.

NCM: single-phase 230 V.


Insulation class H.

Protection IP 43.

Installation

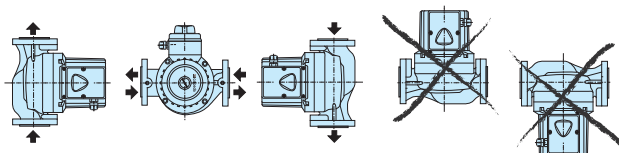

Cross section drawings

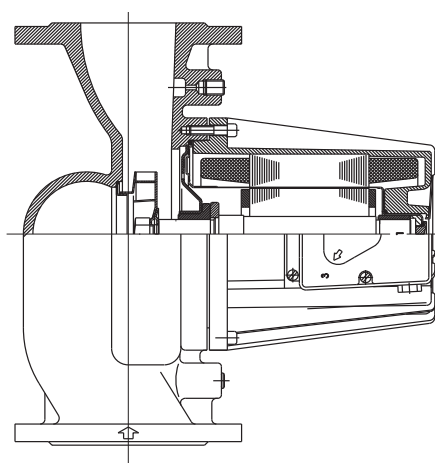


Designation


NC (M) 4 40 - 60 / 250

Series _____
Single-phase motor _____
4-pole motor _____
DN ports in mm _____
Max. head in dm _____
connection size mm _____

Coverage chart





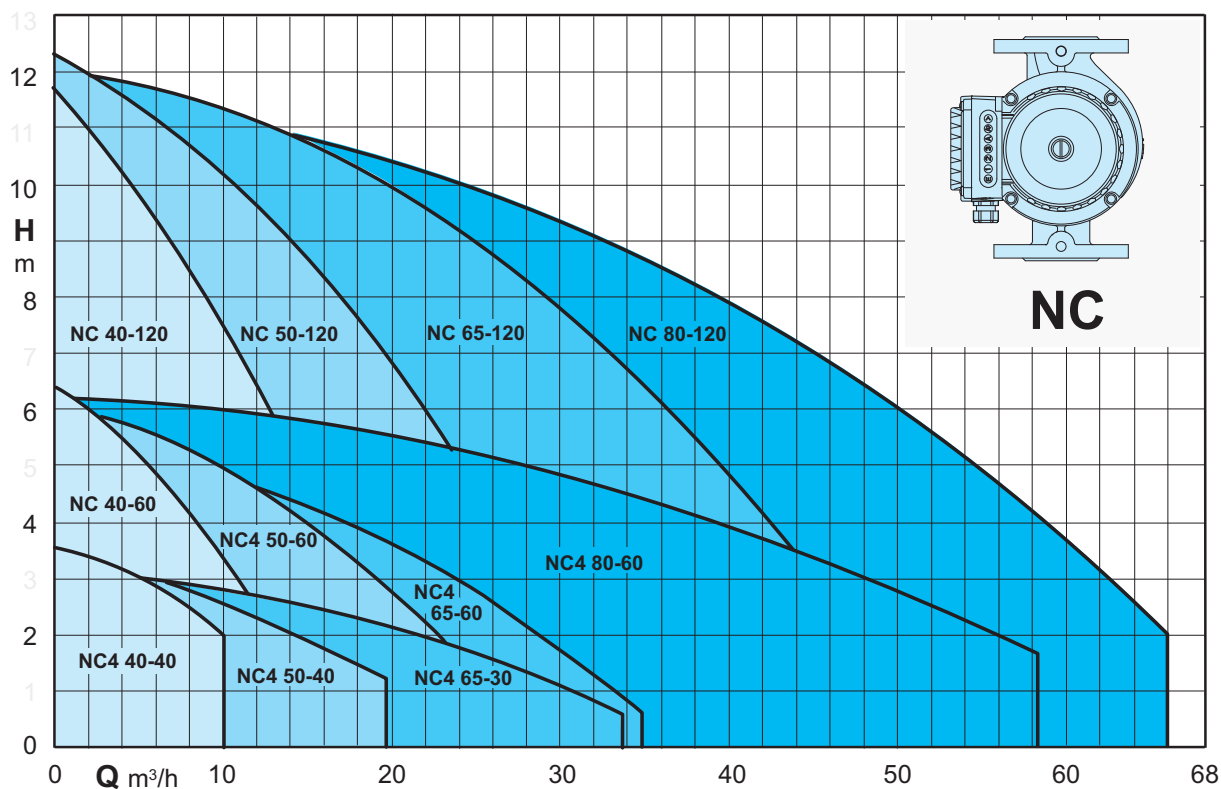


Tolerances in accordance with UNI EN ISO 9906:2012

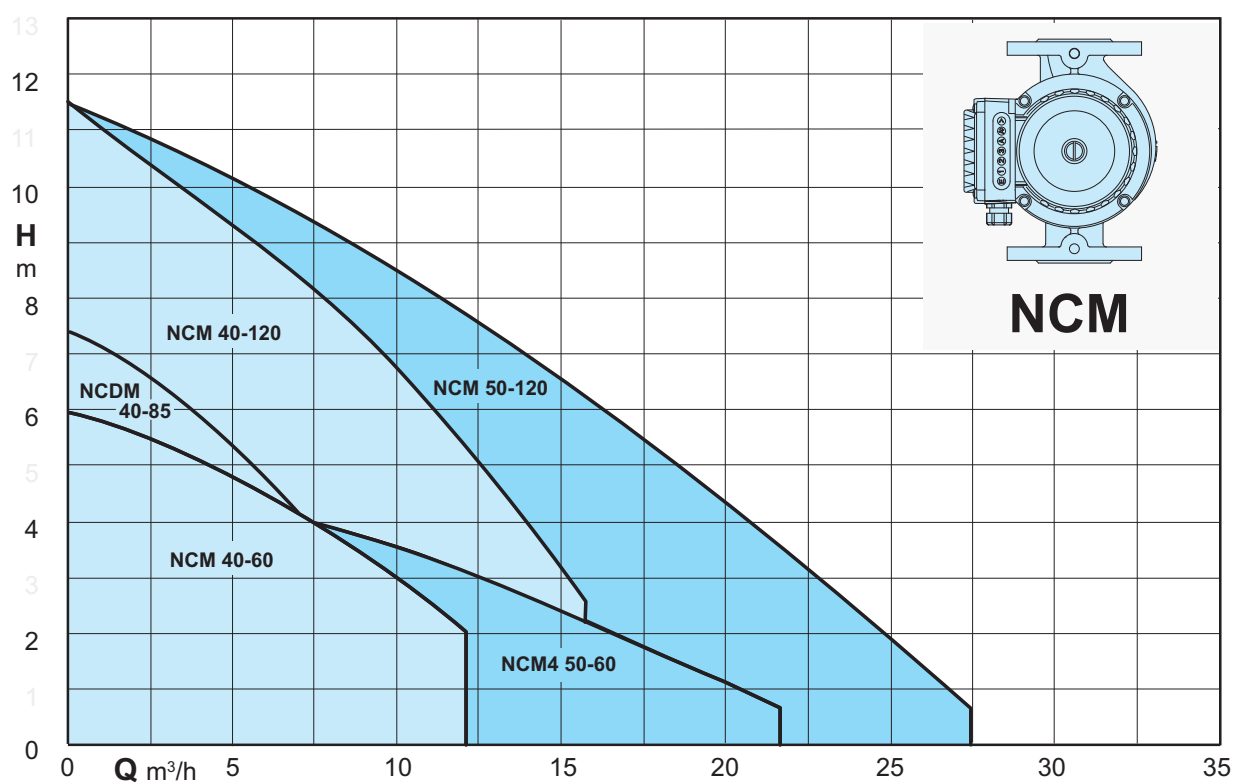








Tolerances in accordance with UNI EN ISO 9906:2012

Characteristic curves, dimensions and weights

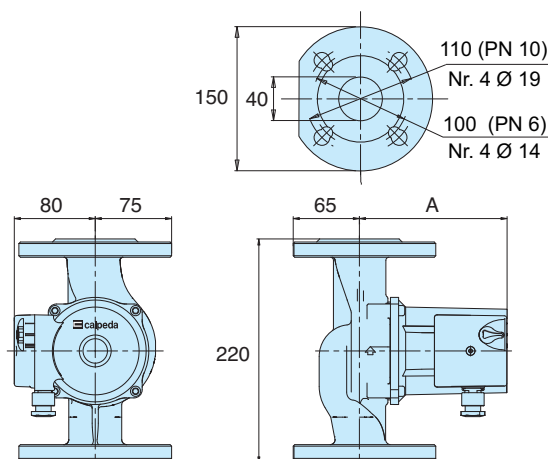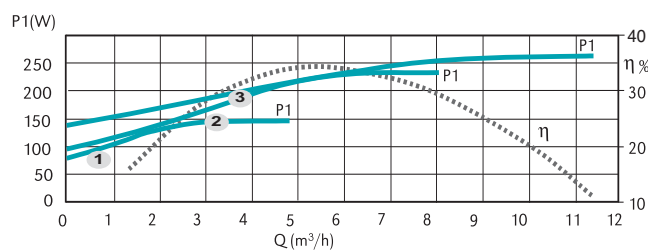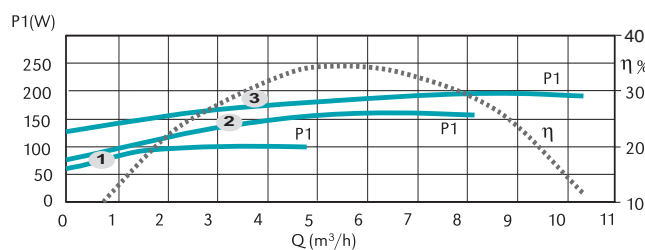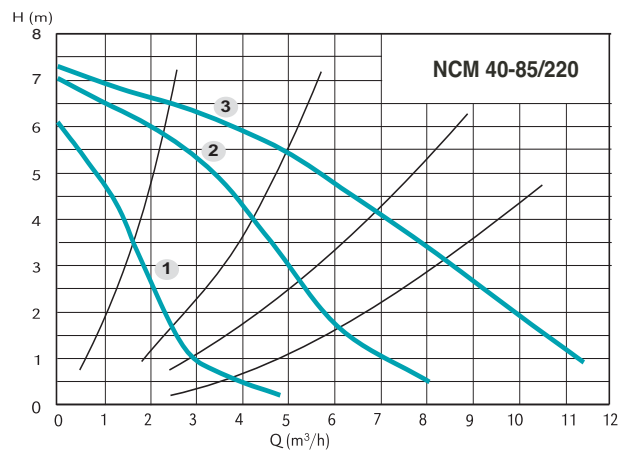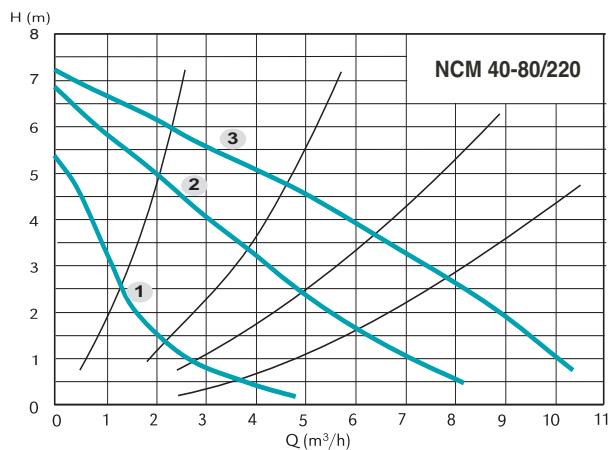






TYPE	DN	PN	N° Poli 2 4	Pos.	P1 (W)	1x 230 V [A]	A [mm]	[kg]
NCM 40-80/220	40	6/10	✓	3	206	0,91	150	8,1
				2	185	0,88		
				1	120	0,60		
NCM 40-85/220	40	6/10	✓	3	277	1,20	175	8,8
				2	250	1,16		
				1	172	0,85		

Characteristic curves, dimensions and weights

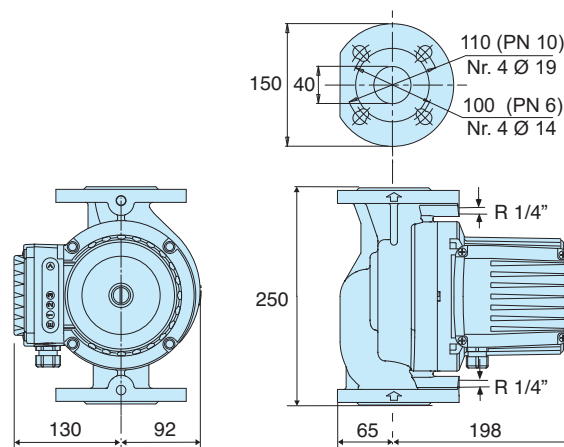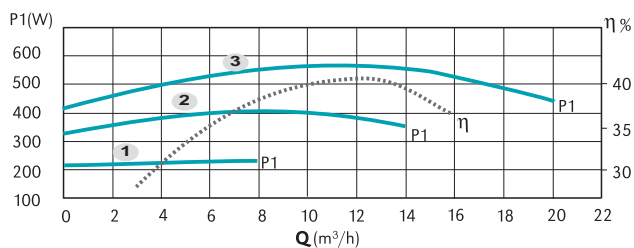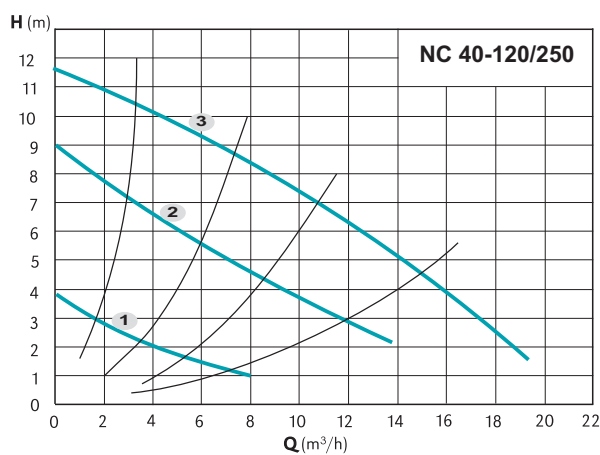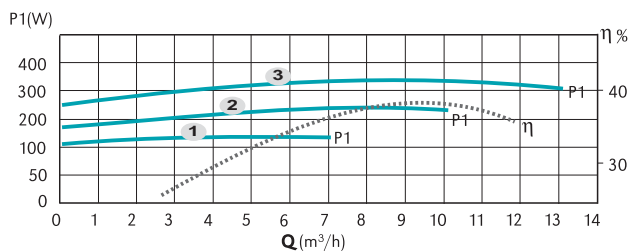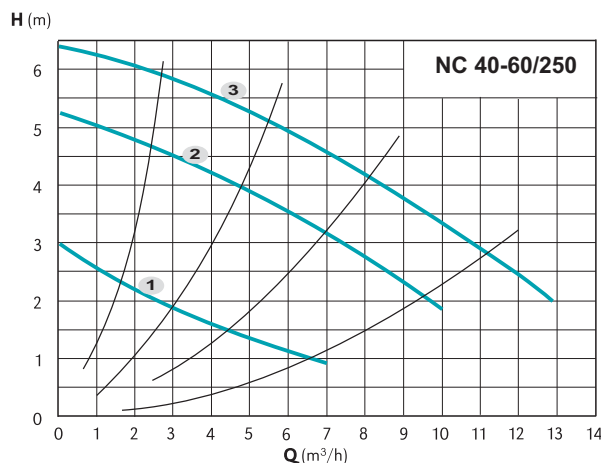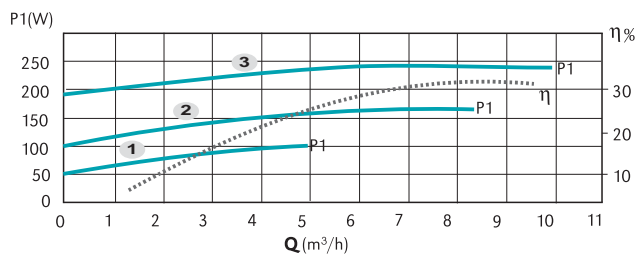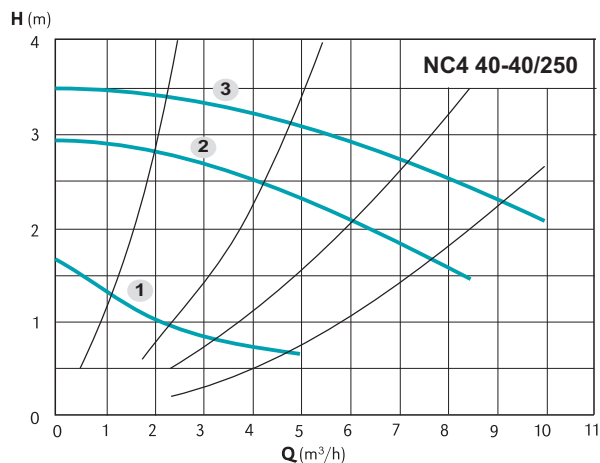








TYPE	DN	PN	N° Poli 2 4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]
NC4 40-40/250/A	40	6/10	✓	3	1440	240	0,76	17,0
				2	1200	160	0,24	
				1	660	100	0,11	
NC 40-60/250/A	40	6/10	✓	3	2790	320	0,74	17,5
				2	2240	240	0,36	
				1	1440	140	0,18	
NC 40-120/250/A	40	6/10	✓	3	2820	560	1,16	19,0
				2	2200	400	0,64	
				1	1250	220	0,26	

Characteristic curves, dimensions and weights

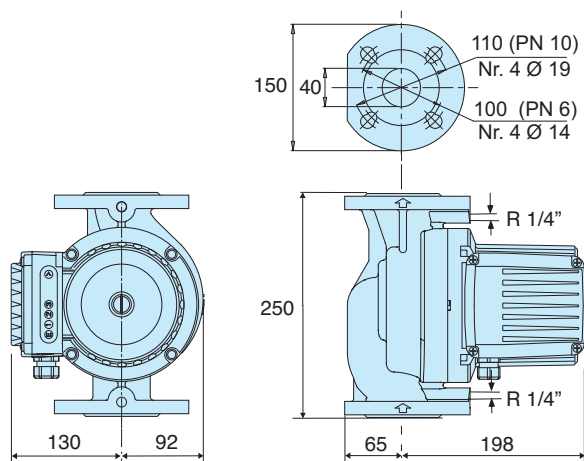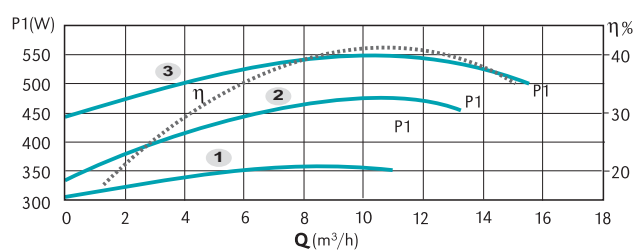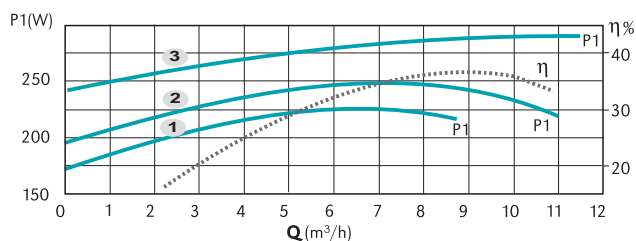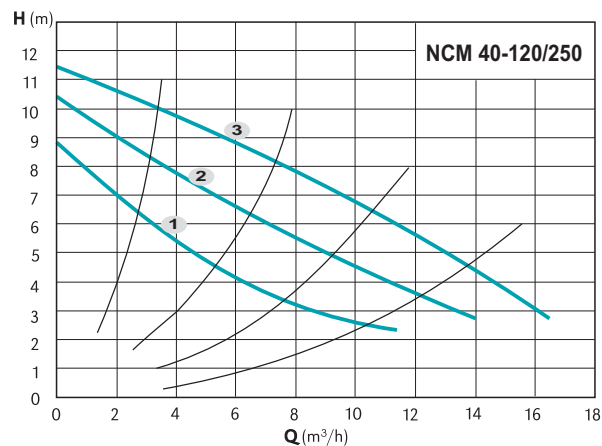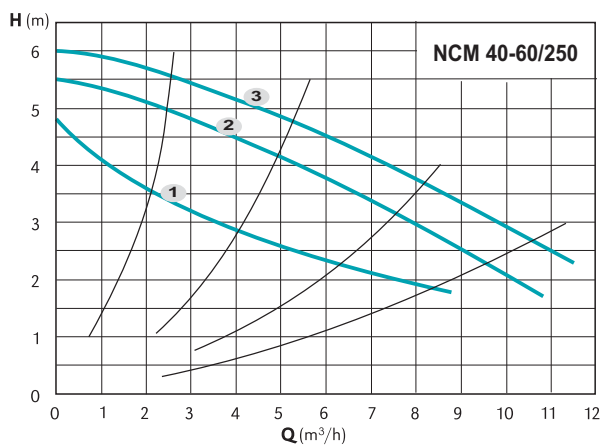






TYPE	DN	PN	N° Poli	Pos.	1/min	P1 (W)	1x 230 V [A]	[kg]
NCM 40-60/250/A	40	6/10	✓	3	2690	285	1,20	17,5
				2	2360	245	1,18	
				1	1820	225	1,15	
NCM 40-120/250/A	40	6/10	✓	3	2750	550	2,35	19,0
				2	2100	475	2,30	
				1	1270	355	1,85	

Characteristic curves, dimensions and weights

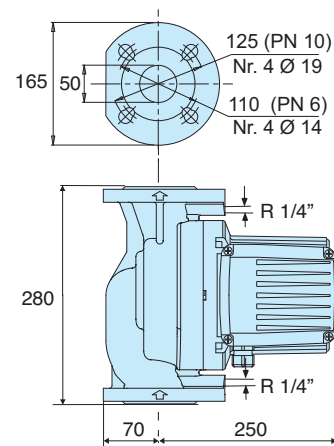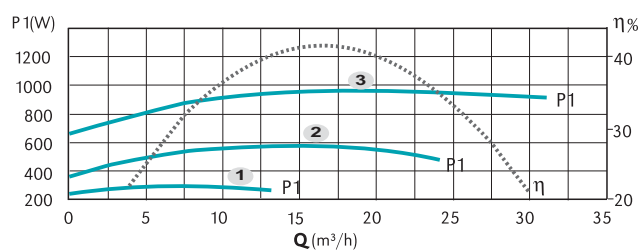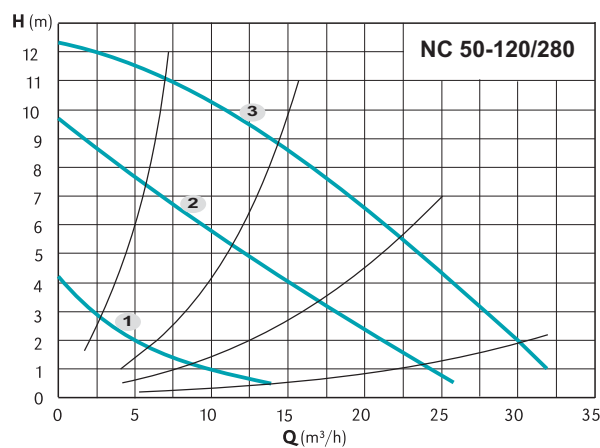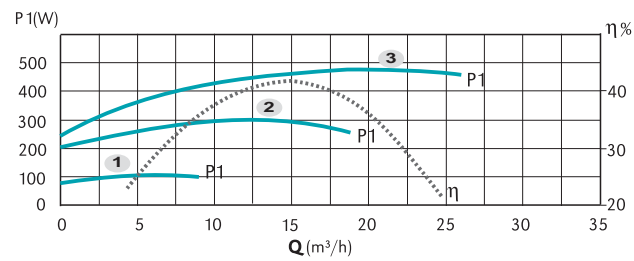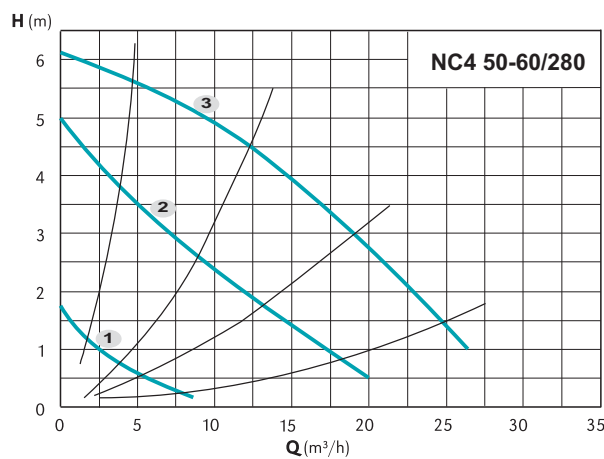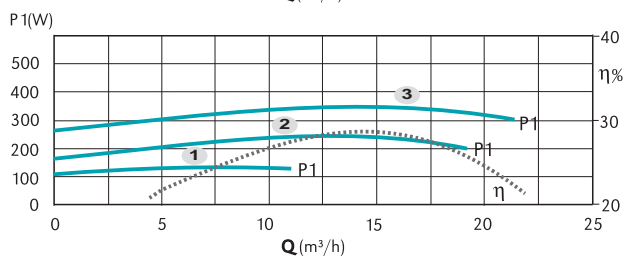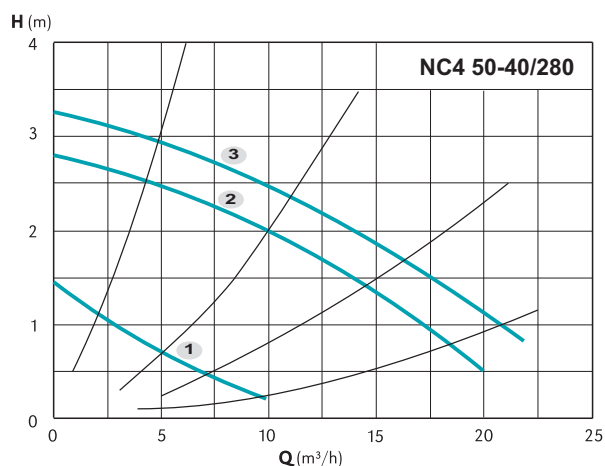








TYPE	DN	PN	N° Poli 2 4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]
NC4 50-40/280/A	50	6/10	✓	3	1450	340	1,05	24,0
				2	1220	240	0,44	
				1	620	120	0,22	
NC4 50-60/280/A	50	6/10	✓	3	1400	470	1,15	24,0
				2	1000	300	0,55	
				1	560	100	0,20	
NC 50-120/280/A	50	6/10	✓	3	2800	950	1,73	24,0
				2	2330	540	1,05	
				1	1270	265	0,46	

Characteristic curves, dimensions and weights

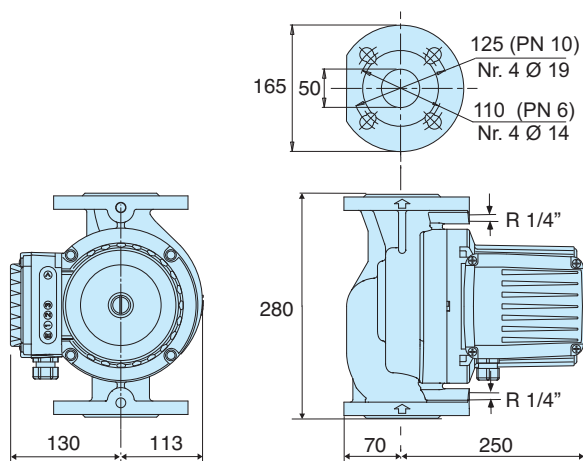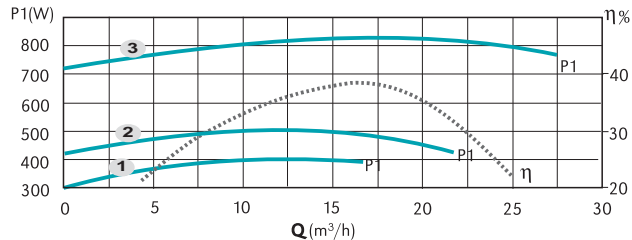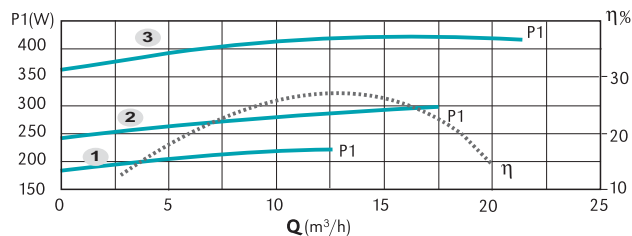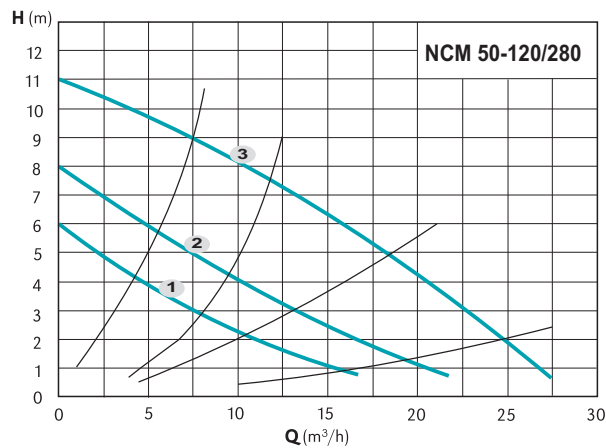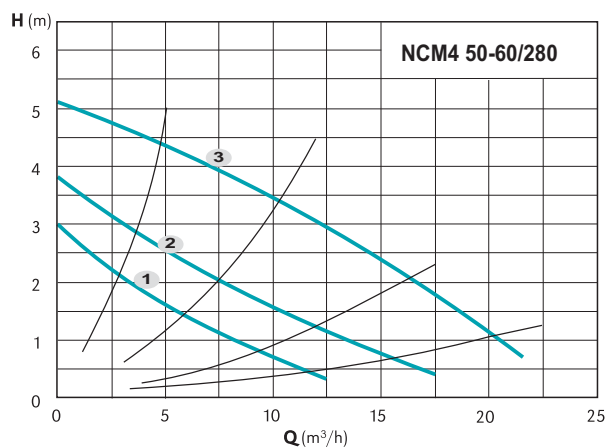






TYPE	DN	PN	N° Poli 2 4	Pos.	1/min	P1 (W)	1x 230 V [A]	[kg]
NCM4 50-60/280/A	50	6/10	✓	3	1260	415	1,8	24,5
				2	1030	300	1,3	
				1	740	230	1,0	
NCM 50-120/280/A	50	6/10	✓	3	2720	830	3,6	24,5
				2	1870	480	2,1	
				1	1450	390	1,7	

Characteristic curves, dimensions and weights

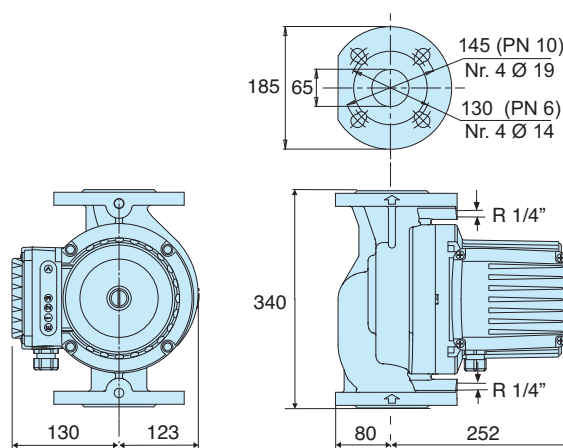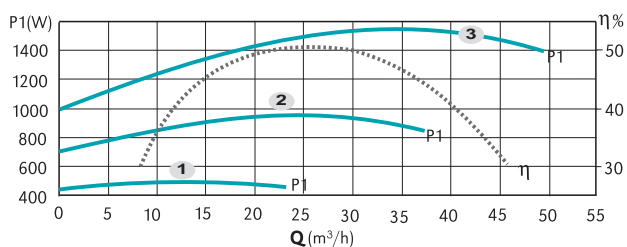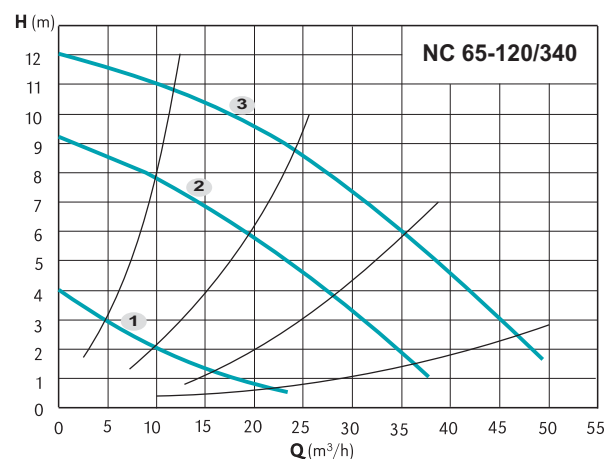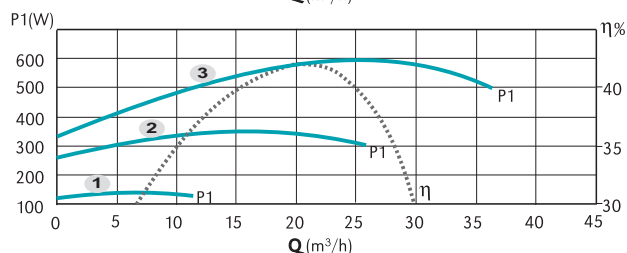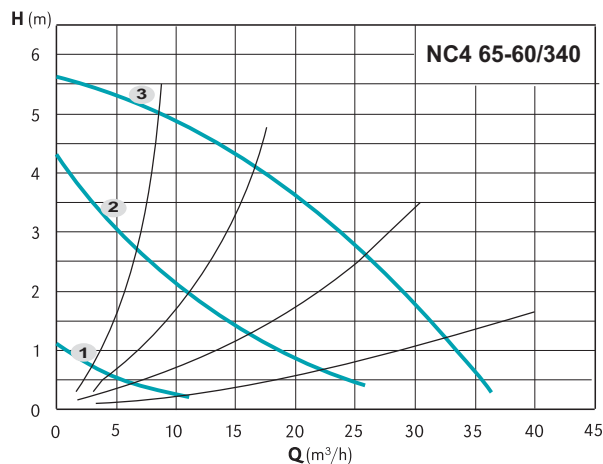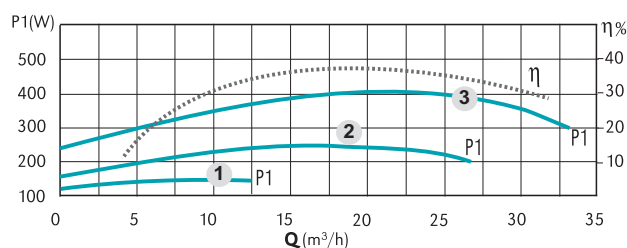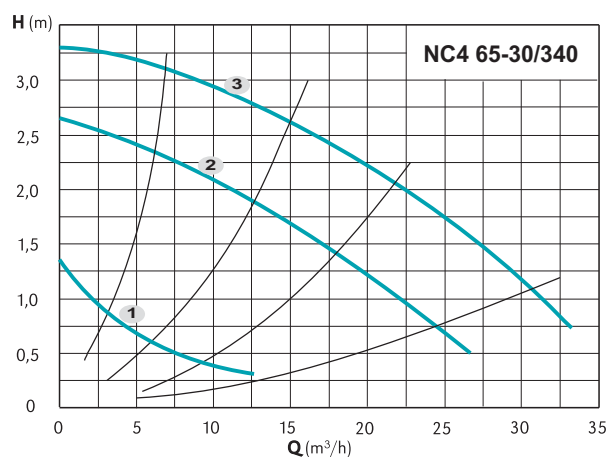

TYPE	DN	PN	N° Poli	2	4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]
NC4 65-30/340/A	65	6/10	✓	3	2	1	1430 1150 600	400 260 120	1,10 0,50 0,22	29,0
NC4 65-60/340/A	65	6/10	✓	3	2	1	1370 950 450	600 360 120	1,25 0,64 0,22	29,0
NC 65-120/340/A	65	6/10	✓	3	2	1	2810 2200 1250	1560 960 460	2,80 1,70 0,84	31,0

Characteristic curves, dimensions and weights

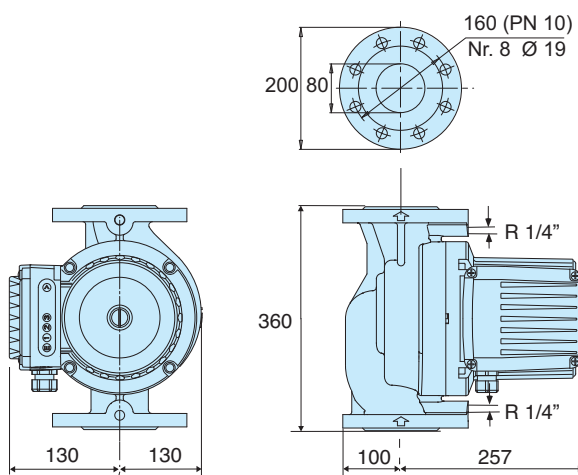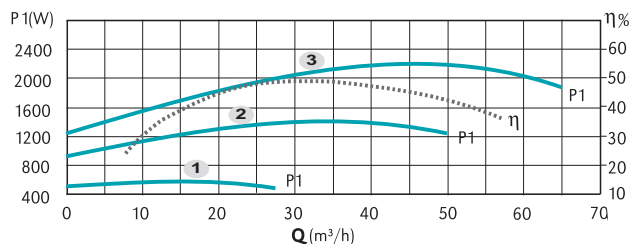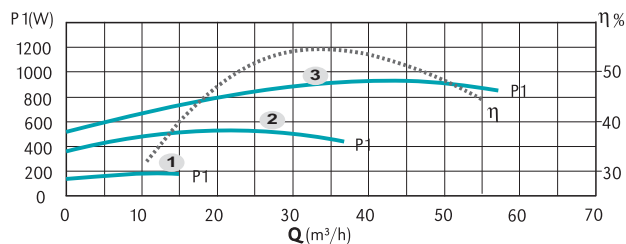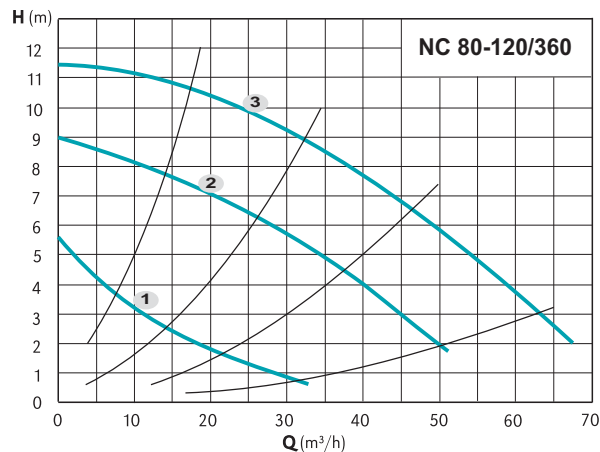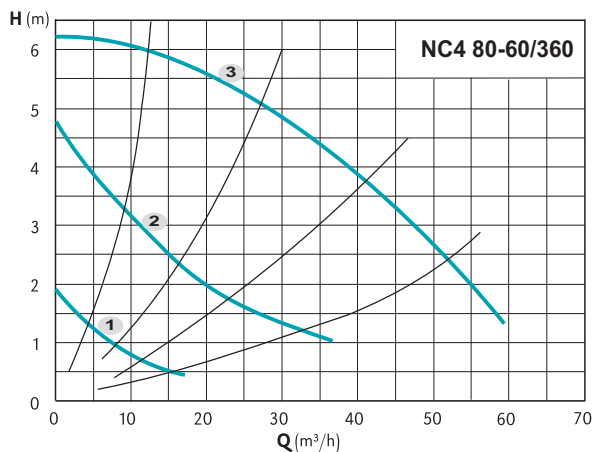

TYPE	DN	PN	N° Poli 2 4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]
NC4 80-60/360/A	80	10	✓	3	1350	960	2,20	33,5
				2	1000	560	1,10	
				1	600	200	0,38	
NC 80-120/360/A	80	10	✓	3	2800	2200	3,80	34,5
				2	2160	1400	2,40	
				1	1200	550	1,05	